
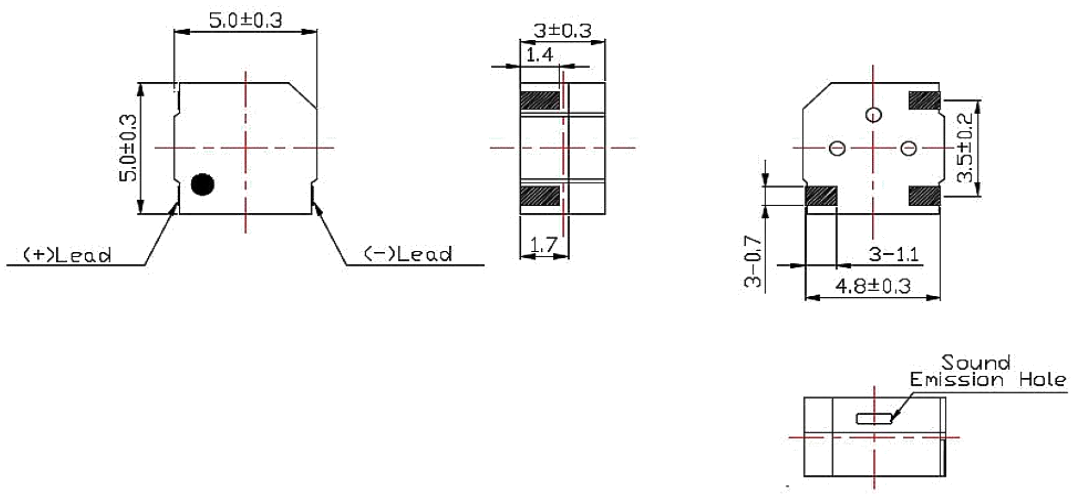
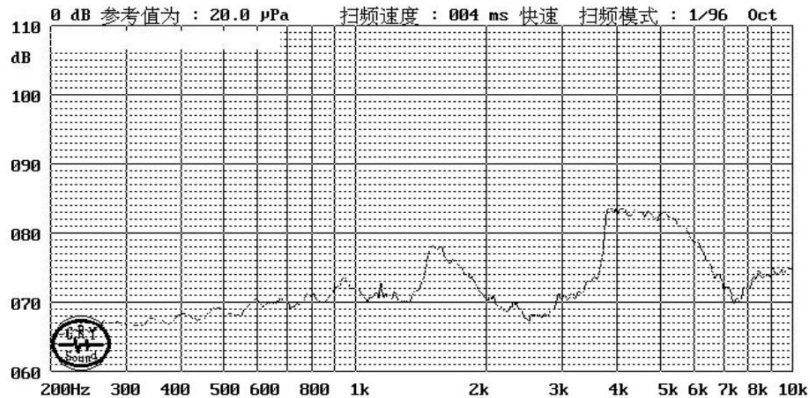


| SPECIFICATION | | |
|---------------|----------------------------|------------------------|
| 1 | Model No. | EET5030HS-03L-4.0-12-R |
| 2 | Rated Voltage (V) | 3 |
| 3 | Max Input Voltage (V) | 2~5 |
| 4 | Rated Current (mA) | ≤110 |
| 5 | Resonance Frequency (Hz) | 4000 |
| 6 | Coil Resistance (Ω) | 12±2 |
| 7 | Sound Output at 10cm (dB) | ≥78 |
| 8 | Operating Temperature (°C) | -20~+70 |
| 9 | Storage Temperature (°C) | -30~+80 |
| 10 | Weight (g) | 0.3 |
| 11 | Housing Material | LCP |
| 12 | RoHS | Yes |


THIS DOCUMENT CONTAINS DATE PROPRIETARY TO PROJECTS CHANGZHOU ESUNTECH CO LTD. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS CHANGZHOU ESUNTECH CO LTD IS PROHIBITED.
©2003, Project Changzhou Esuntech Co Ltd

| REVISION HISTORY | | | |
|------------------|---------------------------|-----------|----------|
| LTR | DESCRIPTION | DATE | APPROVED |
| - | RELEASED FROM ENGINEERING | 9/23/2003 | Y M |
| A | | | |
| B | | | |
| C | | | |

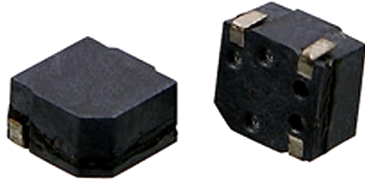

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS
- 2. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

| SIZE | Designed by | Date | Checked by | Date | Approved by | Date | Drawed date | | |
|------|-------------|---|------------|------|-------------|------------------------|-------------|-----------|---------|
| | A4 |  Changzhou Esuntech Co., Ltd http://www.esuntech.com.cn | | | | EET5030HS-03L-4.0-12-R | | TRANSUCER | Edition |