
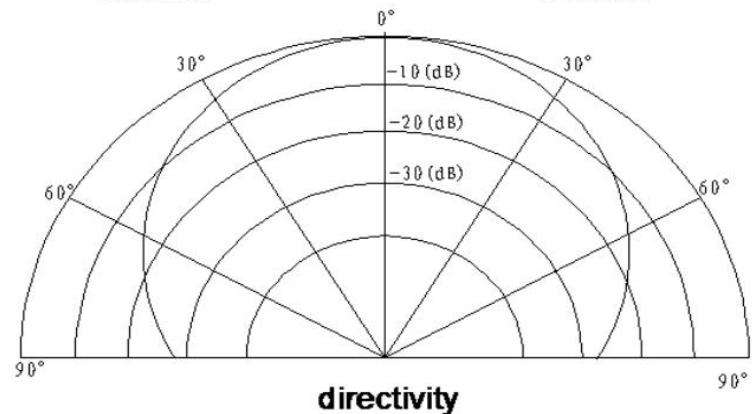
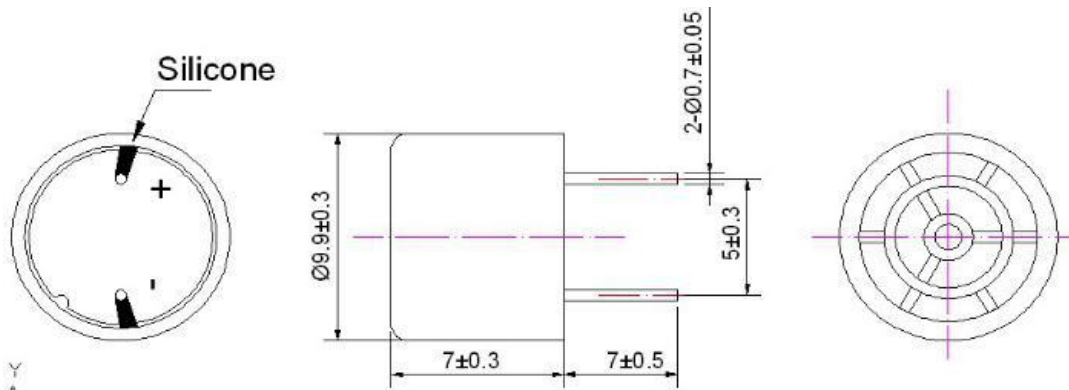


SPECIFICATION		
1	Model No.	EUS10T-40TR-P-2550
2	Construction	Open
3	Using method	Transmitter/Receiver
4	Nominal Frequency	40K
5	Sensitivity	≥-75dBV/μMbar
6	S P L	≥105 (10V/30cm/sine wave)
7	Directivity	80deg
8	Capacitance	2550±25%@1KHz
9	Detectable range	0.2....6
10	Operating Temperature	-20....+80
11	Housing material	Plastic
12	Weight	1


THIS DOCUMENT CONTAINS DATE
 PROPRIETARY TO PROJECTS CHANGZHOU ESUNTECH
 CO LTD. ANY USE OR REPRODUCTION,IN ANY FORM,
 WITHOUT PRIOR WRITTEN PERMISSION OF
 PROJECTS CHANGZHOU ESUNTECH CO LTD
 IS PROHIBITED.
 ©2003,Project Changzhou Esuntech Co Ltd

REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	9/23/2003	Y M
A			
B			
C			

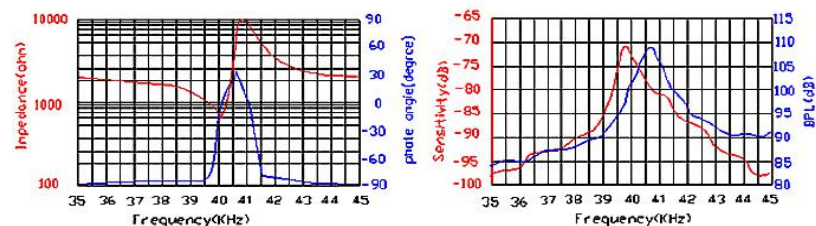

NOTES:

- 1.ALL DIMENSIONS ARE IN MILLIMETERS
- 2.SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawed date
	A4	 Changzhou Esuntech Co.,Ltd http://www.esuntech.com.cn		EUS10T-40TR-P-2550		Ultrasound Sensor	Edition