



SPECIFICATION		
1	Model No.	EUS10T-40TR-P
2	Construction	Open
3	Using method	Transmitter/Receiver
4	Nominal Frequency(HZ)	40K
5	Sensitivity	≥-75dBV/μMbar
6	S P L(dB)	≥ 105 (10V/30cm/sine wave)
7	Directivity	80deg
8	Capacitance(pF)	2200±25%@1KHz
9	Detectable range(M)	0.2....6
10	Operating Temperature(°C)	-20....+80
11	Housing material	Plastic
12	Weight(g)	1


THIS DOCUMENT CONTAINS DATE
 PROPRIETARY TO PROJECTS CHANGZHOU ESUNTECH
 CO LTD. ANY USE OR REPRODUCTION,IN ANY FORM,
 WITHOUT PRIOR WRITTEN PERMISSION OF
 PROJECTS CHANGZHOU ESUNTECH CO LTD
 IS PROHIBITED.
 ©2003,Project Changzhou Esuntech Co Ltd

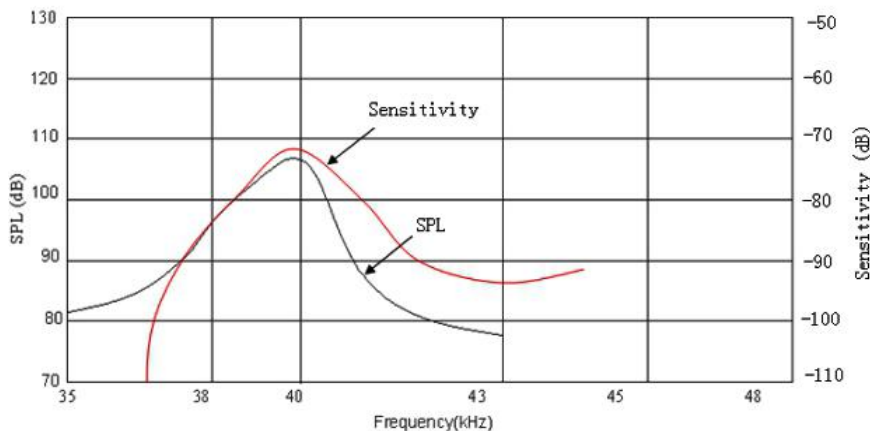


REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	9/23/2003	Y M
A			
B			
C			

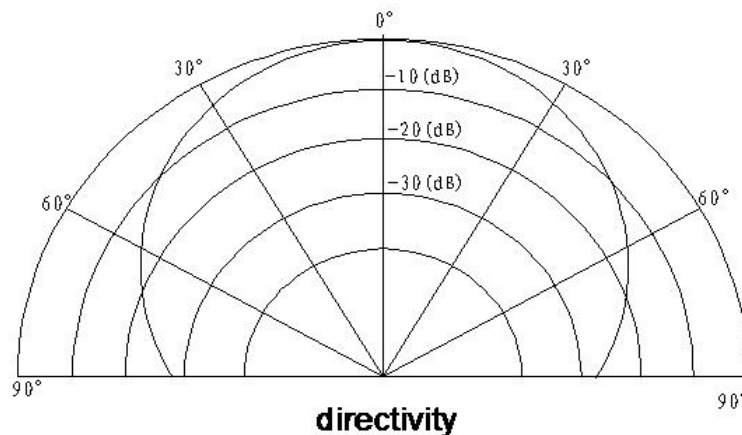

R:receiver
 T:Transmitter
 marked

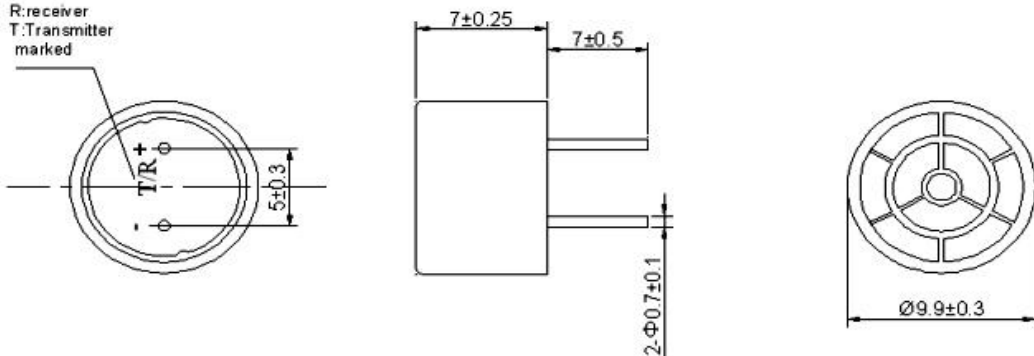

- NOTES:
 1.ALL DIMENSIONS ARE IN MILLIMETERS
 2.SPECIFICATIONS SUBJECT TO CHANGE
 WITHOUT NOTICE

SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawed date
	A4	 EST Changzhou Esuntech Co.,Ltd http://www.esuntech.com.cn			EUS10T-40TR-P		
	Ultrasonic Sensor				Edition	Sheet	